




D290 Four-wire Detector Base (24 VDC)

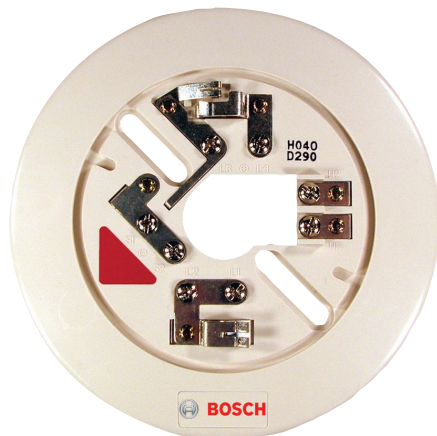

- ▶ 24 VDC, four-wire circuit compatibility
- ▶ Dual Form C relays
- ▶ Low profile construction
- ▶ Easy to install and service
- ▶ Molded in UL Listed white ABS plastic

Use the D290 Detector Base where the specifications call for a 24 VDC, four-wire photoelectric smoke detector. When using the D290, a single pair of wires is run for the initiating circuit and another pair is run for the power. The power circuit connects to the power supply of the control panel or an auxiliary UL Listed power supply. A D275 Power Supervision Module must be installed after the last detector base on each power circuit to properly supervise the circuit voltage.

Certifications and Approvals

Region	Certification
USA	UL UROX: Smoke - Automatic Fire Detectors (UL268 and A)
	CSFM 7300-1615: 115
	NYC-MEA 284-91-E, Vol. II

Installation/Configuration Notes

Compatible Products

The following products are compatible with the D290 Four-wire Detector Base:

Category	Product ID	Product Description
Control Panels		Compatible with all UL Listed four-wire control panels.
Detector Heads	D254	Fixed-temperature(+135°F [+57°C]) heat detector
	D255	Fixed-temperature (+190°F [+88°C]) heat detector
	D256A	Rate-of-Rise and fixed-temperature (+135°F [+57°C]) heat detector
	D257A	Rate-of-Rise and fixed-temperature (+190°F [+88°C]) heat detector
	D282A	Photoelectric smoke detector head
Modules	D283A	Photoelectric smoke detector head with fixed-temperature (135°F [57°C]) heat sensor
	D275	Power supervision module

Mounting

The D290 mounts on standard four-inch octagonal or four-inch square electrical back boxes.

Note

Mounting boxes installed in plenums, pressurized stairwells, or other air spaces must follow all applicable codes and the requirements of the authority having jurisdiction (AHJ).

Wiring

Refer to the installation instructions (P/N: 42885) for detailed wiring requirements.

Parts Included

Quant.	Component
1	D290 detector base
1	Hardware pack
1	Literature pack

Technical Specifications

Environmental Considerations

Temperature (operating): +32°F to +100°F (0°C to +38°C)

Mechanical Properties

Color: Bone white

Dimensions (diameter x D): 5.9 in. x 1 in. (15.1 cm x 2.5 cm)

Outputs

Alarm: Two Form C relays with contacts rated for 2 A at 30 VDC, 1 A at 125 VAC for resistive loads

Power Requirements

Current (alarm): 43 mA

Current (standby): 0.035 mA to 0.055 mA; depends on detector head

Voltage (operating): 17.7 VDC to 30 VDC

Ordering Information

D290 Four-wire Detector Base (24 VDC) **D290**
24 VDC, four wire circuit compatibility

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by