




2C 16 AWG Security Alarm SHIELDED CABLE SPEC

CODE: 16029NH

Cross Section

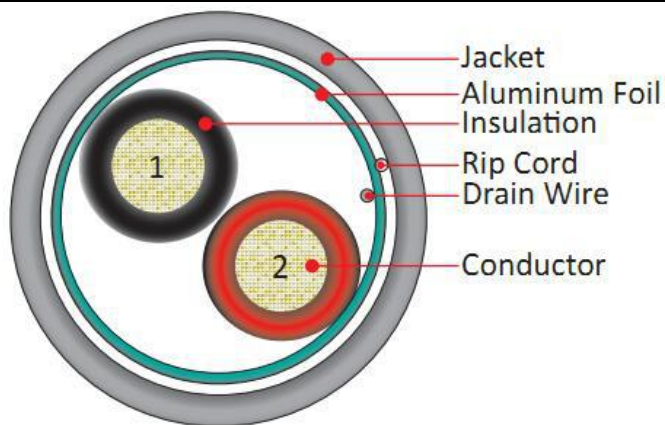

Performance

Electrical Characteristics:

Conductor DC Resistance 20oC (ohms/km)	9.2
proof voltage	Min AC1.5KV
AC Leakage Current Through overall	AC 1500V 10mA
Jacket	< 11.2nF/100M

Description

Rated Temperature (°C)	75
Rated Voltage(V)	300

Regulatory

cETLus&UL1424& & UL 13、 NEC Article 760 & NEC Article 725Type (UL) CMR/CL3R or c(UL) FT4
EU RoHS 2011/65/EU Compliant

Application

Intercom Systems, Security Systems, Sound and Audio, Power Limited Control Circuits, Indoor Applications, Door Controllers, Key Pads, Smoke Detectors.

Construction

Conductor	Stranded Bare Copper
AWG	16AWG X 2C
Conductor Dia. (±0.004mm)	26/0.254MM
Insulation	SR-PVC
Average Thickness(mm)	0.260
Min. Point Thickness(mm)	0.240
Insulation Dia.(±0.05mm)	1.99MM
Colors	Black & Red
Drain wire (TC) Dia.(±0.003mm)	7/0.2MM
Al Foil Shield	Yes
Jacket	PVC-CMR
Average Thickness(mm)	0.44
Min. Point Thickness(mm)	0.40
Outer Dia.(±0.1mm)	5.30MM
Rip Cord	Nylon
Color	Per request

Marking:

**NHTD SECURITY CABLE (CMR) 16AWG
2 CONDUCTOR c(ETL)us VERIFIED RoHS XXXM**

Package

305M / 1000FT Wooden Spool

Mechanical Characteristics:

Insulation

Aging before elongation (%)	≥150
Tensile strength before aging	13.8 Mpa
ageing condition	(100°C 168h)
After aging biggest elongation rate (%)	≥150
Tensile strength after aging	11.7 Mpa
Jacket	
Aging before elongation (%)	≥150
Tensile strength before aging	13.8 Mpa
ageing condition	(100°C 168h)
After aging biggest elongation rate (%)	≥150
Tensile strength after aging	11.7 Mpa

Cold Bend Test -20°C 4hours No Cracking