

PIR Detector



The motion detector is designed with a Passive Infra-Red (PIR) sensor to detect movement within a protected area.

If a person moves within or across the devices field of vision, a trigger radio signal will be transmitted to cause full alarm condition in order to frighten intruders away. The detector is a member of U-Net series of devices and is fully compatible with any U-Net enabled gateway.

Main Features


- Detection range of 110° up to 10m
- Wireless two-way communication
- Adjustable PCB slot for shorter range detection
- Tamper alert protection
- Low battery indication
- Auto-pairing to the gateway
- Reports status to the gateway every hour



Brief Product Specifications

Frequency range	868.30 MHz / 916.00 MHz/ 923.00 MHz
RF range (open space)	>200m
RF protocol	U-Net 3.0
User interface	1 x Tamper button, 1 x LED
PIR detection angle, range	110°, up to 10m

Battery type	3V CR123A lithium cell x 1
Operation temperature	0 - 40°C
Operating humidity	85% RH max
Dimension (mm)	62(W) x 42(D) x 87(H)
Weight	80g, including battery

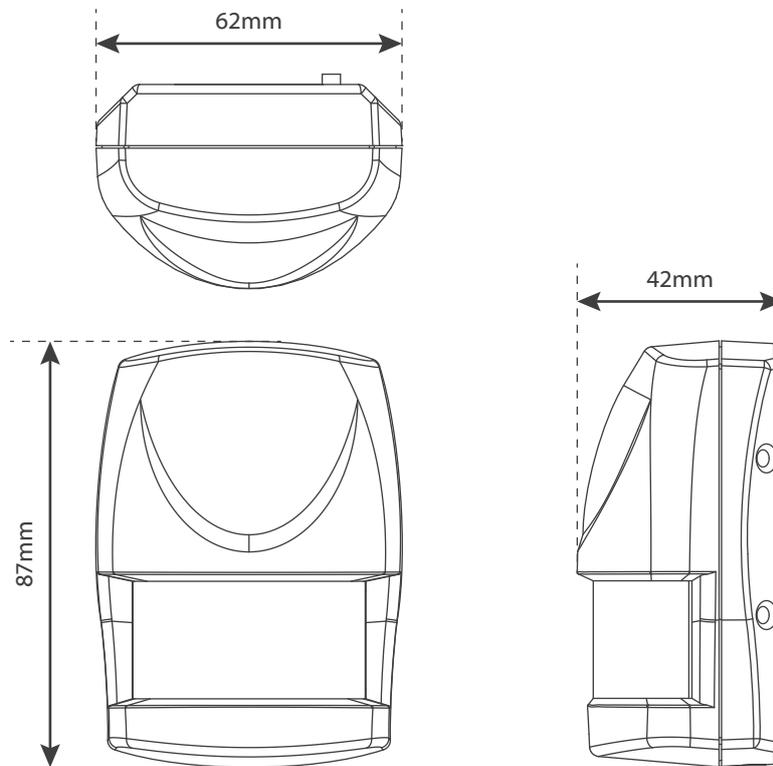

Confidentiality Statement

The purpose of this document is to provide general information about a product or products of Everspring Industry Co., Ltd. All information contained in this document is the confidential property of Everspring Industry Co., Ltd. Except where expressly authorized by Everspring Industry Co., Ltd., alteration, reproduction, redistribution, or transmission of this document by any means is strictly prohibited.