

CAT6 HIGH GRADE 550MHz UTP LOW SMOKE ZERO HALOGEN




DESCRIPTION

Category-6, 23AWG, UTP, LSZH Jacket, 8C Solid Bare Copper, 1000ft.

FEATURES

- High-Performance Data Cable
- 550MHz Bandwidth for Data Applications
- Category-6 Unshielded Twisted Pair
- 23AWG Solid Bare Copper Conductors
- Easily Identified Color-Striped Pairs
- Exceeds EIA/TIA 568-B.2-1, ISO/IEC-11801
- LSZH Jacket, RoHS Compliant
- ETL Listed, 1,000ft Pull Box

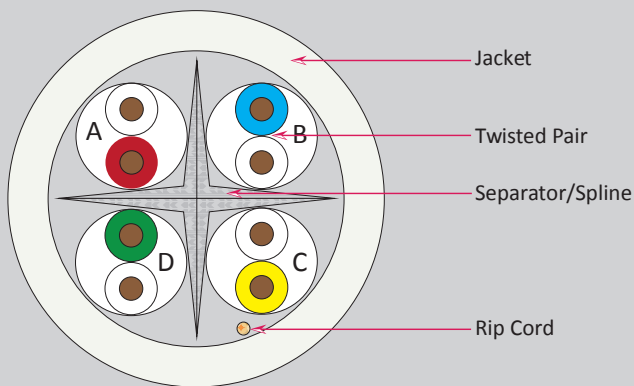

Technical Data

Rated Temperature	70 °C
Rated Voltage	30v

Conductor

Size **Solid Bare Copper**

Insulation

23AWG

Average Thickness (mm) 0.22

Min. Point Thickness (mm) 0.19

Insulation Diameter (±0.005mm) 1.01

Twisted Pair Diameter (±0.01) 2.02

Separator

Assembly Diameter

5.00

Jacket

Average Thickness (mm) 0.60

Min. Point Thickness (mm) 0.50

Outer Diameter (±0.10mm) 6.20

Rip Cord Yes

Color of Pairs

Pair 1	Blue, White-Blue
Pair 2	Orange, White-Orange
Pair 3	Green, White-Green
Pair 4	Brown, White-Brown

Mechanical Characteristics

Test Object	Jacket
Test Material	LSZH
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

Per request

Jacket color available in
Gray



PERFORMANCE

Electrical Characteristics:

1.0-100MHz Impedance (Ohms)	100±15
100-250MHz Impedance (Ohms)	100±25
250-550MHz Impedance (Ohms)	100±35
1.0-250MHz Delay Skew (ns/100m)	<=45
Pair-to-Ground Capacitance Unbalance (pF/100m)	<=330
Max. Conductor DC Resistance 20°C (ohms/km)	95
Resistance Unbalance (%)	<=5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next (ns/100m)
0.772	19.4	1.8	76.0
1	20.0	2.0	74.3
4	23.0	3.8	65.3
8	24.5	5.3	60.8
10	25.0	6.0	59.3
16	25.0	7.6	56.2
20	25.0	8.5	54.8
25	24.3	9.5	53.3
31.25	23.6	10.7	51.9
62.5	21.5	15.4	47.4
100	20.1	19.8	44.3
200	18.0	29.0	39.8
250	17.3	32.8	38.3
350	16.3	39.8	36.1
450	15.5	46.0	34.5
550	14.9	51.7	33.2

Frequency (Mhz)	PSNext (Min dB)	ELFEXT Min(db/100m)	Delay Max(ns/100m)
0.772	74.0	70.0	-----
1	72.3	67.8	570.0
4	63.3	55.8	552.0
8	58.8	49.7	546.0
10	57.3	47.8	545.0
16	54.3	43.7	543.0
20	52.8	41.8	542.0
25	51.3	39.8	541.0
31.25	49.9	37.9	540.0
62.5	45.4	31.9	538.0
100	42.3	27.8	537.0
200	37.8	21.8	536.0
250	36.3	19.8	536.0
350	34.1	17.1	
450	32.5	15.2	
550	31.2	13.2	