

PAN/TILT IR BULLET CAMERA WITH MOTORIZED VF LENS

I5PT-390AHDX10+
I5PT-390AHDX4+




Main Features:

- Preset speed of 12°/Sec (max)
- Preset accuracy up to 0.1°
- Preset position, cruise, pattern and auto scan
- OSD Menu
- IP66 protection.
- Optical zoom
- 2MP "4in1"
- 50m IR LED Array
- True Day/Night with ICR filter
- Noise reduction (3D-DNR)
- WB/AGC/BLC
- CoC Support

Camera Specification

Model		I5-PTZ	
		I5PT-390AHDX10+	I5PT-390AHDX4+
CCD		1/3" CMOS	
Resolution	HD Analog	2MP (AHD / CVI / TVI - 1920x1080)	
	Analog	700TVL	
Optical Zoom	x10 (5.1-51mm)	x4 (2.8-12mm)	
Digital Zoom	No		
Minimum Focus Distance	1.5M		
Horizontal Angle of View	H: 50.4°(Wide) to 5.4°(Tele)	81.2°(Wide) to 22.6°(Tele)	
	V: 29.7°(Wide) to 3°(Tele)	51.5°(Wide) to 12.8°(Tele)	
Sync System	Internal		
Min. Illumination	0.01lux (0 Lux with IR On)		
Day & Night	Auto/Day/Night (ICR)		
S/N Ratio	>50dB		
Focus	Auto/Manual		
Auto Gain	Auto/Manual		
Wide-D	No		
White Balance	ATW/Manual/Outdoor/Indoor		
BLC	On/Off		
Shutter Speed	1/50~1/10000		
Sense Up	No		
Noise Reduction	3D-DNR		
Stabilizer	No		
Flip	On/Off		
Picture Freeze	No		
Iris	Auto		
Flickerness	No		

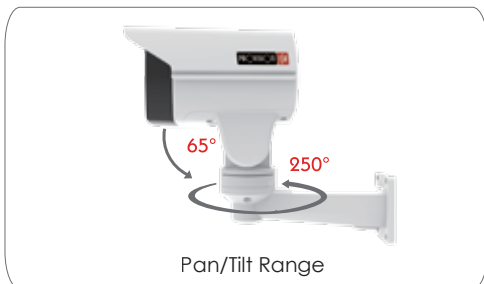

Pan/Tilt Specification

Pan tilt Range	250° Pan/ 65° Tilt
Pan tilt Speed	Max Preset Speed: 12°/Sec Manual: 0.5°~12°/Sec (Proportional to Zoom)
Preset	255
Pattern	Up to 4
Auto Scan	Yes
Group	4 Groups (Non-Configurable)
Schedule	No
Privacy Zone Masking	No
Park Function	Yes (Preset 1 Only)

Communication Specification

Data Type	CoC* (Control over Coax), RS-485
Protocols	CoC / Pelco-D
Baud Rates	2400
Camera ID	1 - 255
Alarm I/O	No
On Screen Display	OSD menu, Camera position

Mechanical

IR Distance	50m IR LED Array
Fan / Heater	No
Sunshield	Yes
Humidity range	<90%
Power Supply	12VDC/2A (Not supplied)
Operation temperature	-20°C~+50°C
Dimensions	225*175*94mm
Ingress Protection	IP66
Weight	920gr

*CoC must be supported on the controlling unit as well

*CoC not supported in CVBS mode