


DHI-HY-MKDZ2

Module Base



- With a plug-in structure, easy to install and construct


Scene

Ideal for scenarios that require fire control rooms, such as residential communities, office buildings, industrial parks, supermarkets and other large public buildings.


Technical Specification

Model	DHI-HY-MKDZ2
Material	ABS
Dimensions	90 mm × 90 mm × 14 mm (3.54" × 3.54" × 0.55")
Color	White
Net Weight	43 g (0.09 lb)
Gross Weight	543 g (1.20 lb)
Packaging Method	100 pcs in each carton
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Humidity	≤ 95% RH (no condensation)
Installation	Wall mount

Dimensions (mm[inch])

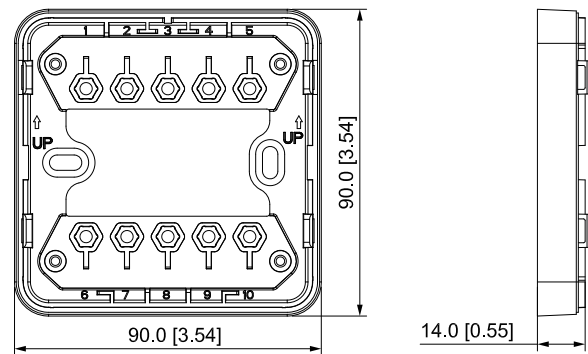

Installation

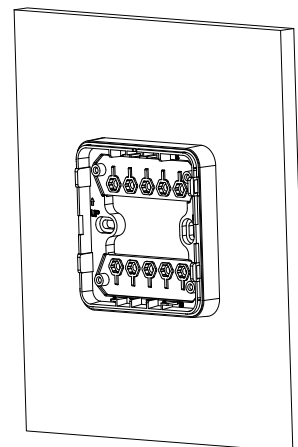

Ordering Information

Type	Part Number	Description
Module Base	DHI-HY-MKDZ2	Module Base
Addressable Input / Output Module	DHI-HY-1410C	Addressable Input / Output Module
Addressable Input / Output Module	DHI-HY-1410E	Addressable Input / Output Module
Addressable Input / Output Module	DHI-HY-1410	Addressable Input / Output Module
Addressable Input Module	DHI-HY-1400	Addressable Input Module
Addressable Output Module	DHI-HY-1420	Addressable Output Module
Isolator Module	DHI-HY-1431	Isolator Module