

XP10-M

Ten Input Monitor Module



Intelligent/Addressable Devices

General

The Notifier XP10-M ten-input monitor module is an interface between a control panel and normally open contact devices in intelligent alarm systems such as manual call points, break glass alarms, or flow switches.

The first address on the XP10-M is set from 01 to 150 and the remaining modules are automatically assigned to the next nine higher addresses. Provisions are included for disabling a maximum of two unused addresses.

The supervised state (normal, open, or short) of the monitored device is sent back to the panel. A common SLC input is used for all modules, and the initiating device loops share a common supervisory supply and ground - otherwise each monitor operates independently from the others.


Each XP10-M module has panel-controlled green LED indicators. The panel can cause the LEDs to blink, latch on, or latch off.

To ensure proper operation, this module should only be connected to a Notifier Inertia addressable analogue FIP.

All wiring must be installed to conform to the Manufacturers specification and all applicable codes and standards.

Features

- Ten addressable initiating device circuits.
- Removable 0.75mm² to 1.5mm² plug-in terminal blocks.

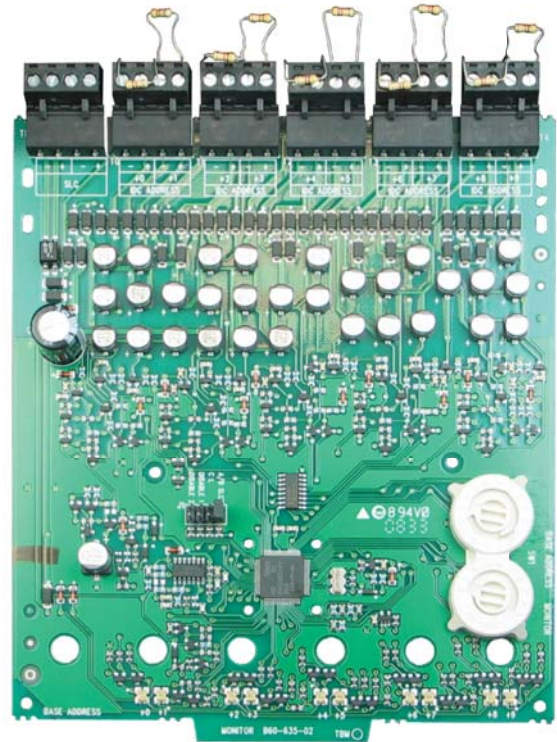

- Status indicators for each point.
- A maximum of 2 unused addresses may be disabled.
- Rotary address switches.
- FlashScan® or CLIP operation.
- Flexible mounting options.
- Mounting hardware included.

Approvals

CSIRO ActivFire listed for use with Notifier AFP-2800 Fire Indicator Panels in afp - 1459.

Specifications

Standby current:	3.5 mA (SLC current draw with all addresses used; if some addresses are disabled, the standby current decreases).
Alarm current:	55 mA (assumes all ten LEDs solid ON).
Temperature range:	-10°C to +55°C.
Humidity:	10% to 93% noncondensing
Dimensions:	172.72 mm high x 147.32 mm wide x 31.75 mm deep.
Wire gauge:	0.75 mm ² to 1.5 mm ² .
Maximum SLC wiring resistance:	40 ohms.
Maximum IDC wiring resistance:	1500 ohms.
Maximum IDC voltage:	10.2 VDC.
Maximum IDC current:	240 µA.
EOL Resistor Value:	47K ohms.

Ordering Information

FG-05-031

XP10-M 10 way switch input module

© 2009 by Honeywell International Inc. All rights reserved.
Unauthorised use of this document is strictly prohibited.

This document is not intended for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information contact your nearest Notifier Sales Office or Distributor
www.notifier.com.au