

VTO6441F

Face Recognition Apartment Outdoor Station



Features

- Face recognition unlock
- 4.3" TFT Screen, 800×480
- Supplemental lighting with white light
- 2MP CMOS camera
- Mechanical button with Braille
- Aluminium alloy plate, IP55, IK08
- Door release via password and Mifare card

Technical Specification

Model	VTO6441F
-------	----------

System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

Face ID

Face template	10000, speed: 0.5s
---------------	--------------------

Video

Video Compression	H.264
-------------------	-------

Image Sensor	1/2.9" 2MP CMOS
--------------	-----------------

Auto Gain Control	White Light
-------------------	-------------

Lens	2mm
------	-----

Angle of View	H:140° V:88°
---------------	--------------

Day/Night	Color Image
-----------	-------------

Audio

Audio Compression	G.711
-------------------	-------

Audio Input	Omnidirectional Mic
-------------	---------------------

Audio Output	Built-in Speaker
--------------	------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

Display

Screen	4.3" IPS, 800×480
--------	-------------------

Operation Mode

Keypad	Mechanical Button with Braille
--------	--------------------------------

Reader	Mifare Card(13.56MHz)
--------	-----------------------

Approaching Induction

Body Approaching	0.6m
------------------	------

Interface

Alarm In/Out	2/2
--------------	-----

Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
--------------	---

Wiegand In	1
------------	---

Network

Ethernet	10M/100Mbps
----------	-------------

Network Protocol	TCP/IP
------------------	--------

General

Ingress Protection	IP55, IK08
--------------------	------------

Tamper Switch	1
---------------	---

Installation	Flush
--------------	-------

Material	Aluminum
----------	----------

Power	DC 12V, 2A
-------	------------

Power Consumption	Standby ≤10W, Work ≤15W
-------------------	-------------------------


Working Temperature	-30°C~+60°C
---------------------	-------------

Relative Humidity	20%~95%RH
-------------------	-----------


Dimensions	410mm×154mm×51mm
------------	------------------

Weight	3Kg
--------	-----

Dimensions

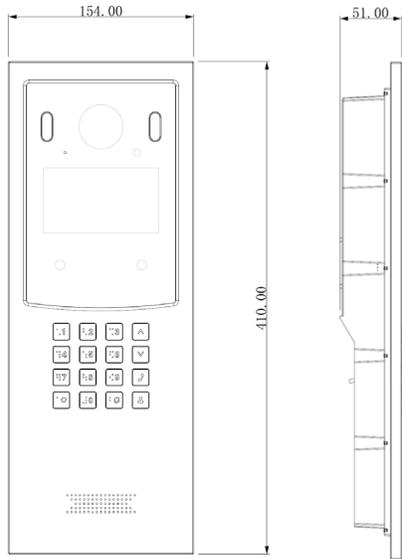

View Area

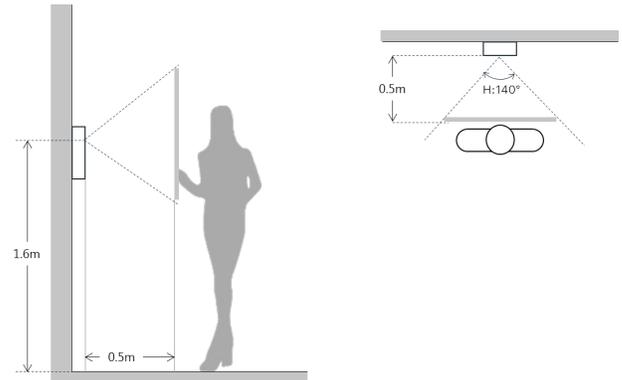

Application

