



FUENTE DE PODER - SWITCHING


220VAC/48VDC 10A


User Manual


Sine Wave Inverter Power Supply



AC to DC 48V 10A 480W Voltage Transformer Switch Power Supply For Led Strips

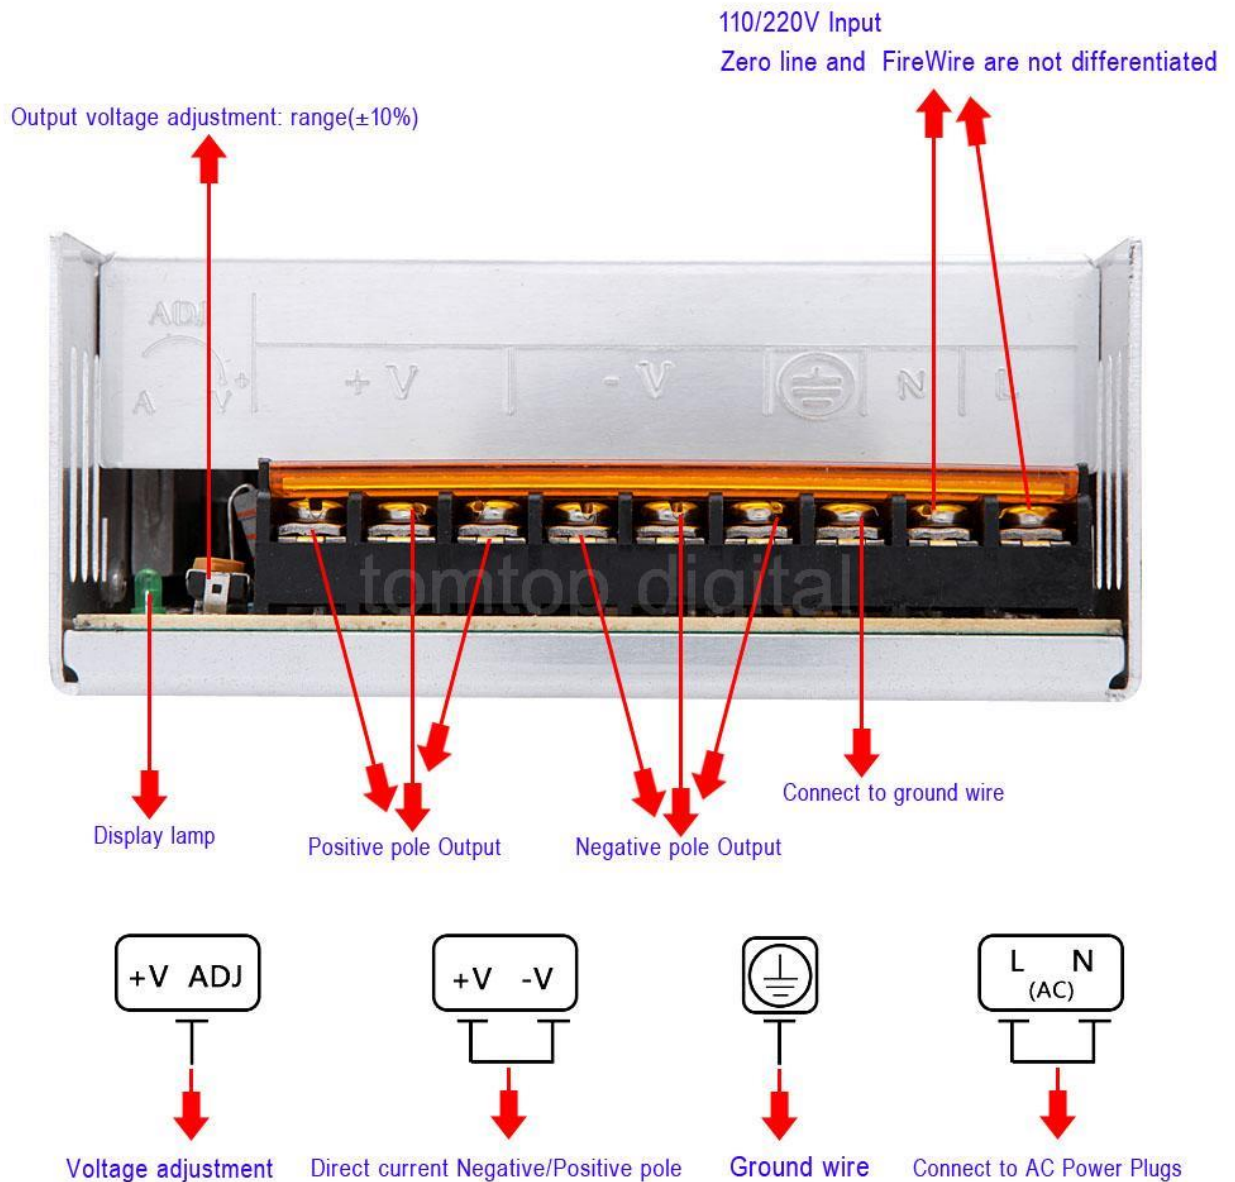

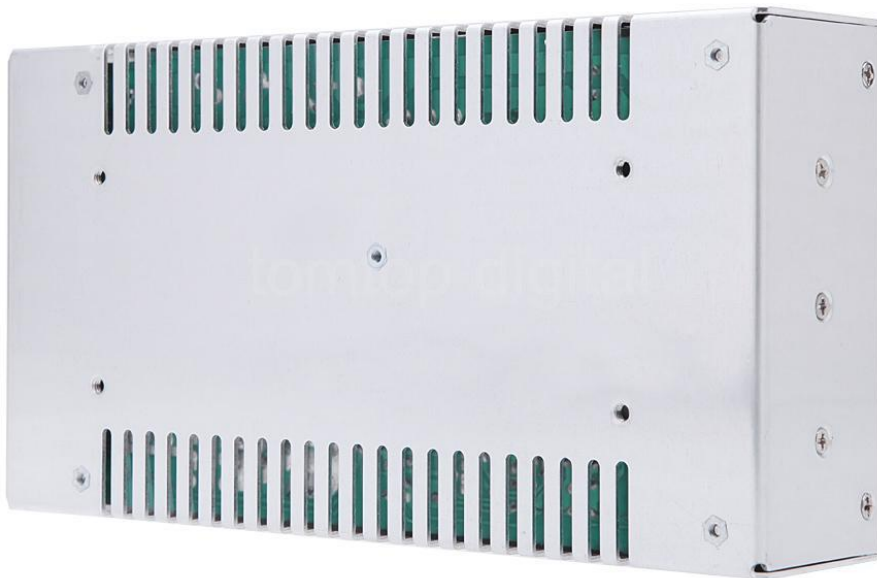

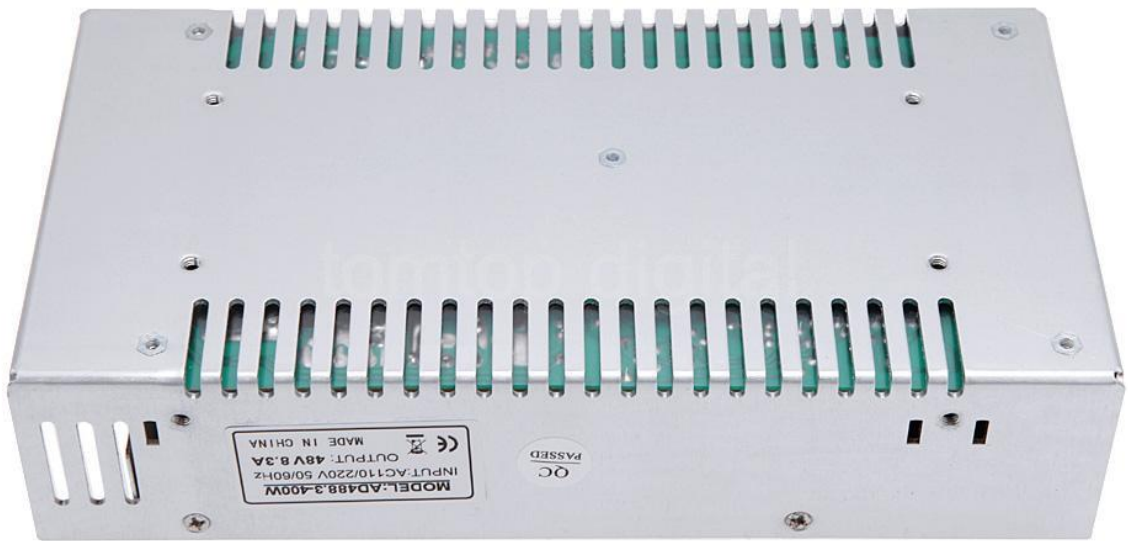

This switch power supply convert AC to DC, widely used in the power adapter, Led lights strip, LED display, billboard, industrial equipment, etc.

Features:

Switch power supply, convert AC 110V/220V to DC 48V .

Dual input voltage: AC 110V/220V. There is a switch, choose the proper voltage before use.

Steady and precise output voltage.

Short circuit protection, overload protection(105%~150%), over voltage protection(115%~135%).

Widely used as the power adapter for Led strip, LED display, billboard, industrial equipment, etc. IN-DOOR USE ONLY!

Specifications:

Material: Metal case

Input voltage: AC110/220V \pm 15%

Input Frequency: 50/60Hz

Input surge: Cold start 25A@115V AC 50A@230V AC

Output voltage: DC 48V

Output voltage adjustment range: \pm 10%

Output current: 10A

Current Range: 0~8.3A

Output power: 480W

Working temperature: -40~65 degree Celsius

Peso neto: 870 gram

Dimensiones: 21,5 * 11,5 * 5,2 cm.

Storage Temperature: -20°C - +60°C

Humidity: 20%~90%RH Non-Condensation

Item size: 21.4 * 11.3 * 4.8cm / 7.9 * 3.9 * 1.9in

Item weight: 704g / 1.55lb

Package size: 22.0 * 11.7 * 5.2cm / 8.7 * 4.6 * 2.0in

Package weight: 748g / 1.65lb

Package List: L0143

1 * Voltage Transformer